




pulseSlicer

Often there is a need for a variable bandwidth or pulse width of an ultrashort laser pulse, but the standard laser sources typically generate fixed or slightly variable pulses only. The *pulseSlicer* is a simple solution for narrowing broadband laser pulses by spectral cutting.

An optical system disperses the pulses spatially, and in the plane where the spectral components are separated, the spectrum is controlled via a mask. Afterwards, the dispersed pulse is recollimated.

With the narrowing of the spectrum the pulse width is modified accordingly, resulting in longer pulses. Of course the transmitted power is reduced proportionally to the amount of spectral cutting, but many applications are not power limited when considering the available laser input power.

- Easily variable output bandwidth / pulse width
- Simple solution for narrowing broadband laser pulses

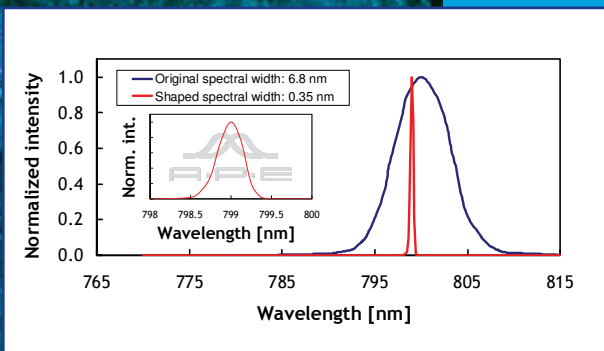


Specifications

Wavelength ranges	700 ... 1100 nm or 1000 ... 1600 nm (others on request)
Minimum output bandwidth $d\lambda_{out}$	0.3 nm
Static transmission T_s	0.5 ... 0.7 (depending on wavelength range)
Overall throughput	$T_s * d\lambda_{out} / d\lambda_{in}$

Option

- Autotracker - for automatic optimization to input wavelength variations

Dimensions (in mm)

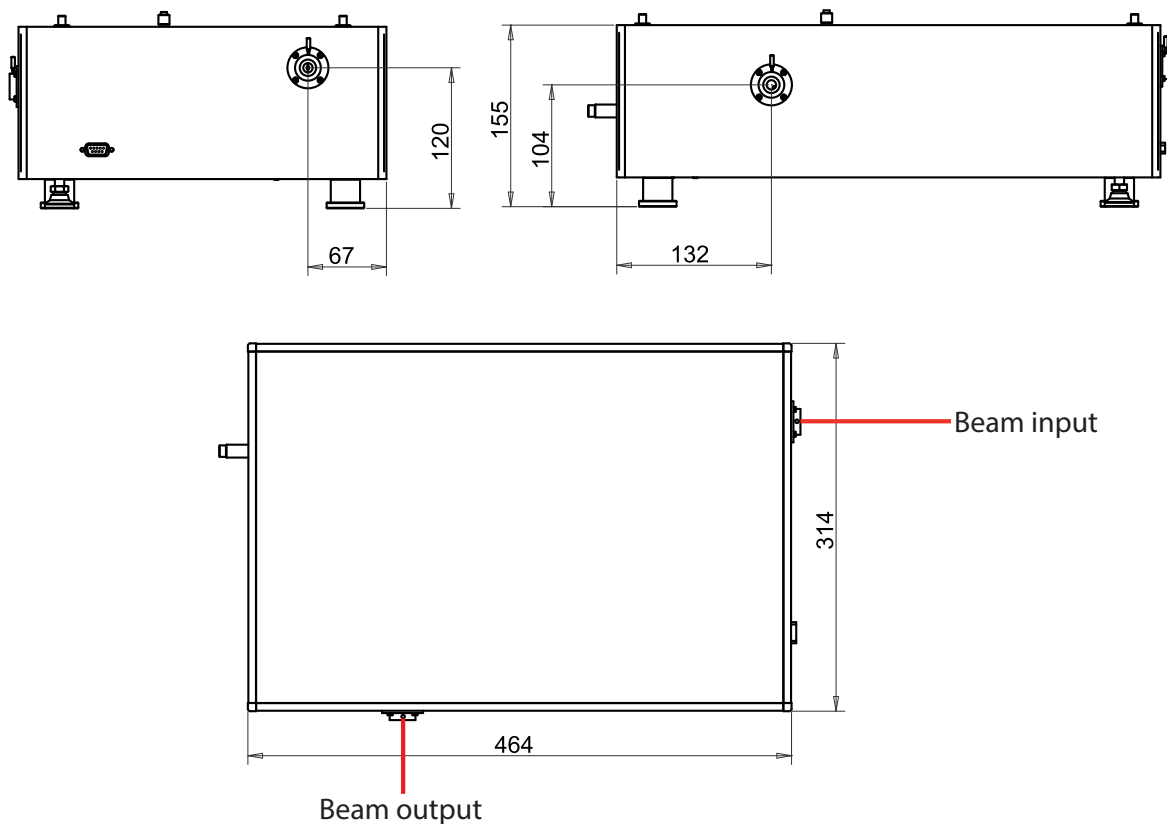

Contact:

A·P·E Angewandte Physik & Elektronik GmbH
 Plauener Str. 163-165 | Haus N | 13053 Berlin | Germany
 T: +49 30 986 011-30 | E: sales@ape-berlin.de | www.ape-berlin.com
 or
 A·P·E America (for the Americas)
 45401 Research Avenue | Suite 141 | Fremont, CA 94539 | USA
 T: +1 (888) 690 3250 | E: sales@ape-america.com | www.ape-america.com

A·P·E follows a policy of continued product improvement.
 Therefore, specifications are subject to change without notice.
 © A·P·E | November 2014

脉动科技有限公司

中国代理商

北京总部 地址: 海淀区中关村东路89号 恒兴大厦9C, 100190 电话: 010-62565117 010-84413925 传真: 010-62565117-11 邮箱: info@pulsepower.cn 官网: www.pulsepower.cn

上海办事处 021-32070812 西安办事处 029-87307077 深圳办事处 0755-27528760