

Pulsed Single-Frequency Fiber Laser ^{NEW}

AP-P-SF

(Wavelength: 2 μm , 1.55 μm , 1 μm)

The pulsed single-Frequency fiber lasers are designed to provide the highest pulse energy in a single longitudinal mode. This series of products at 2 μm , 1.55 μm , and 1 μm provide new capabilities to research and industry applications.

With their compact size, high efficiency, low maintenance, and ease of operation, AdValue Photonics' fiber lasers provide many advantages over traditional bulk solid state lasers.

Applications:

- LIDAR
- Frequency conversion
- Mid-IR generation
- Spectroscopy

Features:

- Single longitudinal mode
- High pulse energy
- Customizable operating wavelength
- Nanosecond pulses
- Near diffraction limited beam quality
- Turn-key system with no maintenance required



Optical Characteristics:

Parameter	Specification		
	AP-P-SF-1950	AP-P-SF-1550	AP-P-SF-1060
Operation mode	Pulsed		
Spectral linewidth	Single Frequency (single longitudinal mode)		
Typical operating wavelength	1.95 μm	1.55 μm	1.03, 1.06 μm
Customizable wavelength	1.9 ~ 2.1 μm	-	-
Max. pulse energy	0.5 mJ	0.5 mJ	0.5 mJ
Pulse width	100-300 ns (non-adjustable, factory selectable)		
Pulse repetition rate	10-200 kHz (non-adjustable, factory selectable)		
Max. average power	10 W		
Beam quality, M^2	< 1.3		
Output polarization	Random Polarization or Linear Polarization		
Output delivery	Free-space collimated beam ~ 1 mm diameter (beam expansion available)		


(Customization options available.)

Specifications subject to change without notice

General Characteristics:

Parameter	Specification
Operating temperature	10 to +30 °C
Storage temperature	-10 to +70 °C
Cooling	Water cooled
Power requirement	AC 100~240 V (50/60Hz)
Warm-up time	10 minutes
Package dimensions	450(W) x 400(D) x 145(H) (optical module only, not including a separate control unit)

Mechanical Outline:

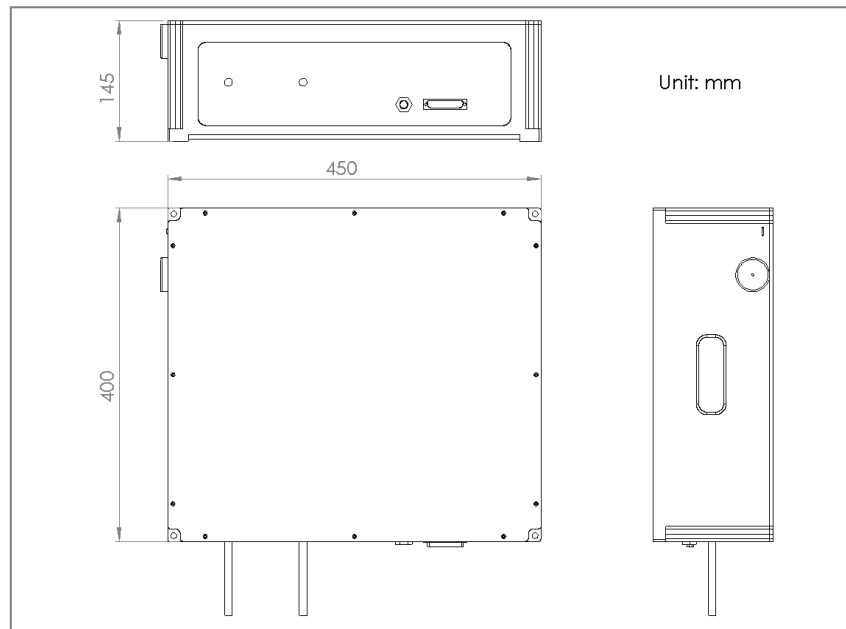

Ordering Information:

AP-P-SF	-	xxxx	-	xxxx	-	xxx	-	xxx	-	xx
Standard Wavelength:										
1950 = 1.95 μm										
1550 = 1.55 μm										
1060 = 1.06 μm										
1030 = 1.03 μm										
Pulse Energy:										
0500 = 0.5 mJ										
Pulse Width:										
100 = 100 ns										
300 = 300 ns										
Pulse Rep Rate:										
010 = 10 kHz										
050 = 50 kHz										
100 = 100 kHz										
Polarization:										
RP = random polarization										
LP = linear polarization										

(For custom requests, please contact AdValue Photonics at 1-520-790-5468 or sales@advaluephotonics.com.)



脉动科技有限公司

中国代理商

北京总部 地址: 海淀区中关村东路89号 恒兴大厦9C, 100190 电话: 010-62565117 010-84413925 传真: 010-62565117-11 邮箱: info@pulsepower.cn 官网: www.pulsepower.cn

上海办事处 021-32070812 西安办事处 029-87307077 深圳办事处 0755-27528760

AdValue Photonics Inc.
3440 E. Britannia Drive
Suite 190
Tucson, AZ 85706 USA

Specifications subject to change without notice