


I4 (1342nm) DIODE PUMPED SOLID STATE LASER



Model Name	I4-250-1342	I4-500-1342	I4-1000-1342
Wavelength	1342nm		
Output Power	250mW	500mW	1W
Spatial Mode	TEM ₀₀ , M ² < 1.2		
Longitudinal Mode	Single Longitudinal Mode	Multi-Mode	
Power Stability	< +/- 2 % over 8 hours		
Noise	< 0.5 % RMS (typ. 0.2%)		
Beam Diameter	Approx. 1mm at output aperture		
Beam Divergence	< 2.5mRad (collimation options available)		
Polarization	>100:1, Vertical		
Laser Head Size	126mm long x 62mm x 51mm		
Power supply	279mmx 205mm x 138mm		
Cooling	Head: Internal TECs, convection through base, 12 W. PSU: Internal fan air cooled		
Power requirement	100 - 240 VAC, 50 / 60 Hz Max 60W		

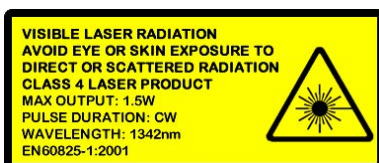

脉动科技有限公司

中国代理商

北京总部 地址: 海淀区中关村东路89号 恒兴大厦9C, 100190
 电话: 010-62565117 010-84413925
 传真: 010-62565117-11 邮箱: info@pulsepower.cn
 官网: www.pulsepower.cn

上海办事处 021-32070812
 西安办事处 029-87307077
 深圳办事处 0755-27528760

Elforlight Ltd, 4b Brunel Close, Daventry, Northants NN11 8RB, UK

Tel +44(0)1327 300069 | Fax +44(0)1327 300076

Web: www.elforlight.com | Email: info@elforlight.com