


Short Pulse InnoSlab Lasers GX-Series

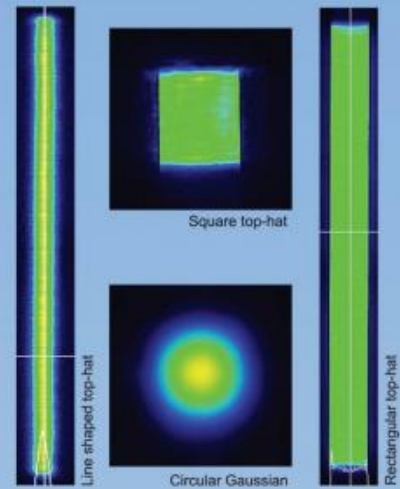


Unique features

- short pulse
- high pulse energy
- high peak power
- high repetition rate
- compact setup
- flexibility on crystal choice
- tailored beam profile

Favourable applications

- laser lift-off
- annealing
- ablation, structuring and scribing
- solar cell processing
- glass processing
- pumping of dye laser, OPA, OPO
- PIV and LIF

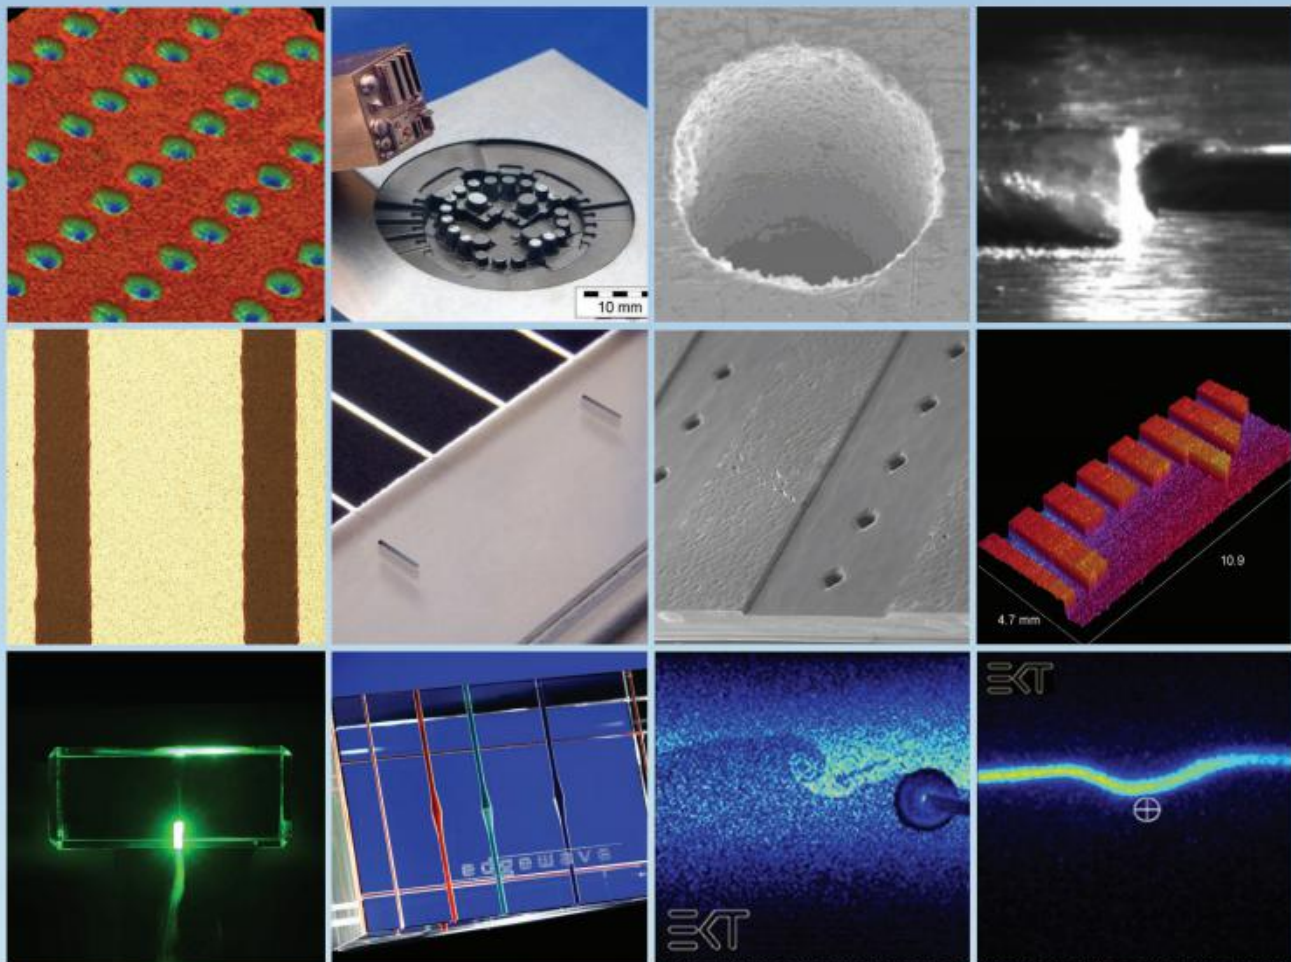


Overview of GX-Series

Model	GXxxx-1	GXxxx-2	GXxxx-3	GXxxx-4
Wavelength [nm]	IR	Green	UV	DUV
highest beam quality M ²	1.1	1.1	1.5	2
max. average power [W]	800	400	200	30
max. repetition rate [kHz]	100	100	100	20
max. pulse energy [mJ]	120	60	30	5
min. pulse width [ns]	1	1	1	1
Energy stability [%] rms	< 2	< 4	< 4	< 4
Timing stability [ns]	< 5	< 5	< 5	< 5
Polarisation	> 1:100	> 1:100	> 1:100	> 1:100
Beam ellipticity (far field) [%]	< 10	< 10	< 10	< 10
Diameter at window [mm]	3	3	3	3
Divergence full angle [μrad]	500	250	250	225
Point stability [μrad]	< 50	< 60	< 50	< 50
Warm-up time, from cold start [min]	< 15	< 20	< 30	< 30
from standby [min]	< 8	< 15	< 30	< 30

Utility & Ambient Requirements	
Power supply	90 - 264V, 50/60Hz or 180 - 264V, 50/60Hz
Power	4kW-8kW
Chiller	230, 208, 115, 100V, 50/60Hz or 460/280V, 50/60Hz
Power	4kW-8kW
Operating ambient Temperature	15°C to 35°C
Relative Humidity, non-condensing	10% to 80%

Dimensions & Weights	
Laser head	675mm x 360mm x 150mm
Supply incl. Chiller	19" x 18RU x 700mm
Laser head	70kg
Supply incl. Chiller	100kg

EdgeWave follows a policy of continuous product improvement. Specifications are subject to change without notice.

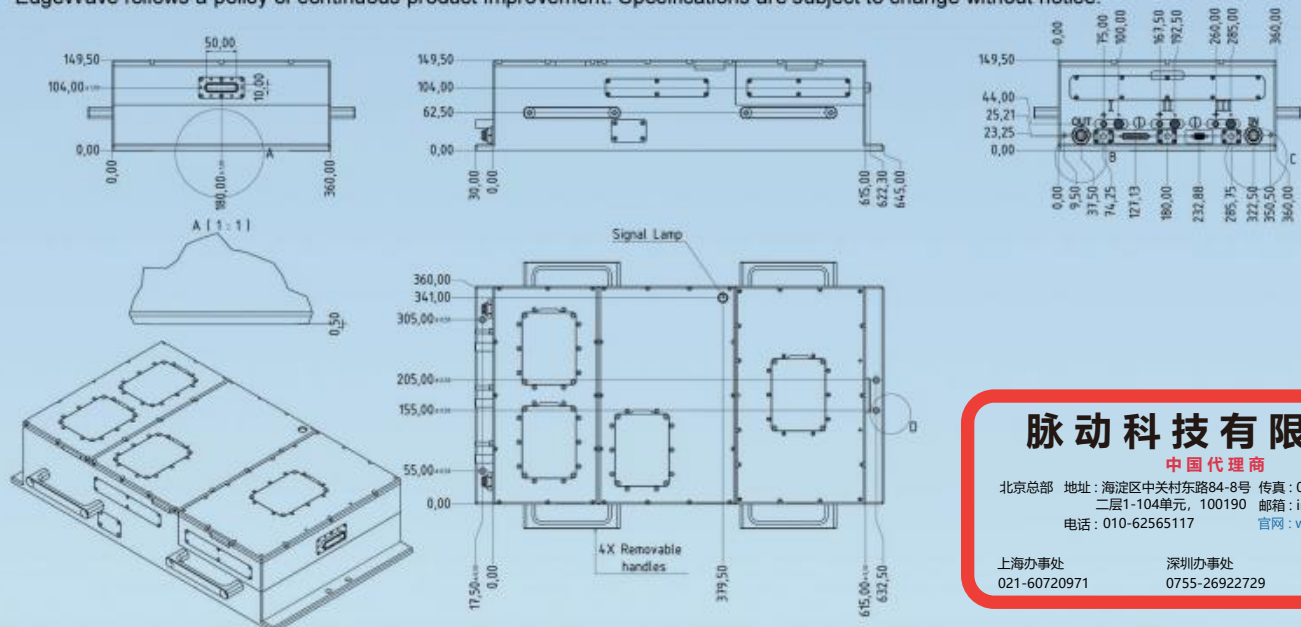

脉动科技有限公司

中国代理商

北京总部 地址：海淀区中关村东路84-8号 传真：010-62565117-803
 二层1-104单元, 100190 邮箱：info@pulsepower.cn
 电话：010-62565117 官网：www.pulsepower.cn

上海办事处
 021-60720971

深圳办事处
 0755-26922729

成都办事处
 17710735621

edgewave
 Innovative Laser Solutions

EdgeWave GmbH, Carlo-Schmid-Straße 19, D-52146 Würselen
 Tel.: +49 2405 4186 0, Fax: +49 2405 4186 33
 email: info@edge-wave.com www.edge-wave.com