

THz Band Pass Filters

THz Band Pass Filters are designed to transmit radiation in the wavelength range 20-3000 μm . The filters are fabricated from thin metal foil with holes. Configuration of the holes depends on the required wavelength.

The filters settle the problems of quasioptical filtration of radiation in THz range. They also permit to get high degree of monochromatization while the aperture ration of device is also high.

The Band Pass Filters are highly recommended when it is important to have high spectral resolution with high aperture ratio as well as small overall dimensions and weight of the device.

Applications:

- THz spectroscopy;
- Imaging;
- THz testing devices;
- Astronomy, space based astronomy, and astrophysics;
- Materials research;
- Sensors and detectors;
- Electro-optic research.

Features:

- Any pass band in the range from 0.1 to 15 THz (from 3000 to 20 μm);
- High transmittance (60-90%) in pass band;
- Low transmittance (<4%) in stop bands;
- Available in cryostats and electro-optic assemblies;
- Damage threshold is 65-100W/cm² (in the range from 0.1 to 15 THz);
- Mounted in holders.

Part Number Designation for Tydex Band Pass Filters:
BPF <frequency, THz>-<aperture, mm>

Sizes and Shapes

Round filters with clear aperture/outer diameter 24/31, 35/44, and 47/60 mm and pass band 0.3, 0.5, 1.0, 3.0, 10.0, and 15.0 THz are available from stock.

Alternate sizes and custom designs are available upon request.

Transmission Curves

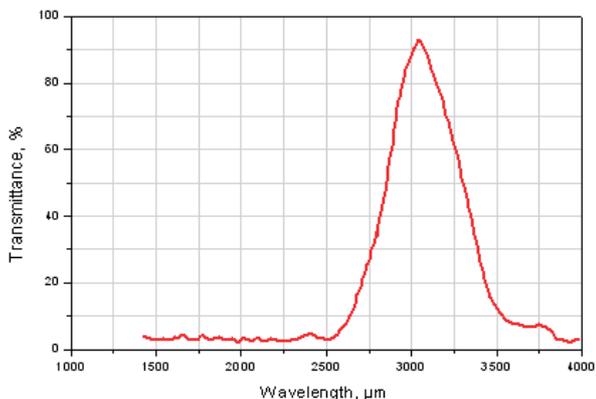


Fig. 1 Transmission of BPF0.1

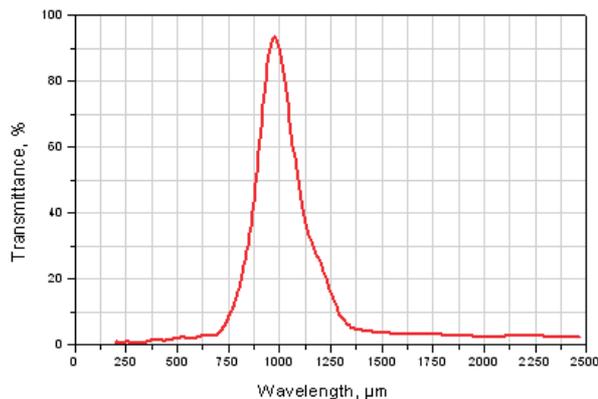


Fig. 2 Transmission of BPF0.3.

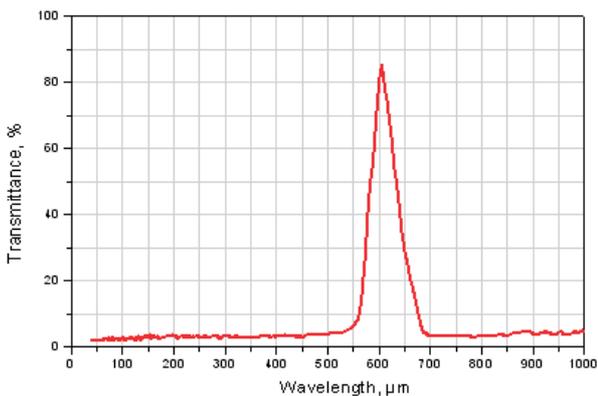


Fig. 3 Transmission of BPF0.5.

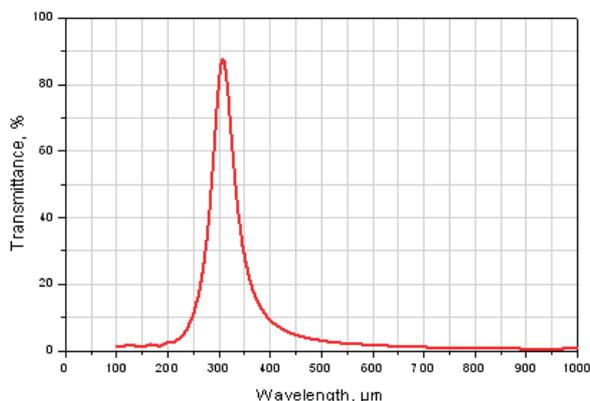


Fig. 4 Transmission of BPF1.0.

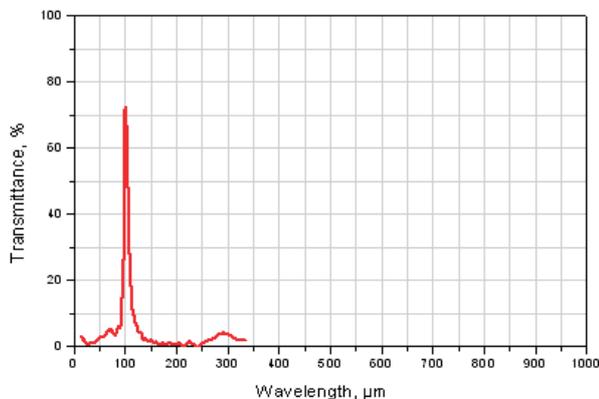


Fig. 5 Transmission of BPF3.0.



TYDEX[®]
J.S.C.O.

Domostroitelnaya str. 16, 194292 St.Petersburg, RUSSIA
Tel: 7-812-3346701, -3318702; Fax: 7-812-3092958
E-mail: optics@tydex.ru, URL: <http://www.tydex.ru>

脉动科技有限公司

中国代理商

北京总部 地址: 海淀区中关村东路89号 恒兴大厦9C, 100190 电话: 010-62565117 010-84413925 传真: 010-62565117-11 邮箱: info@pulsepower.cn 官网: www.pulsepower.cn

上海办事处
021-32070812

西安办事处
029-87307077

深圳办事处
0755-27528760

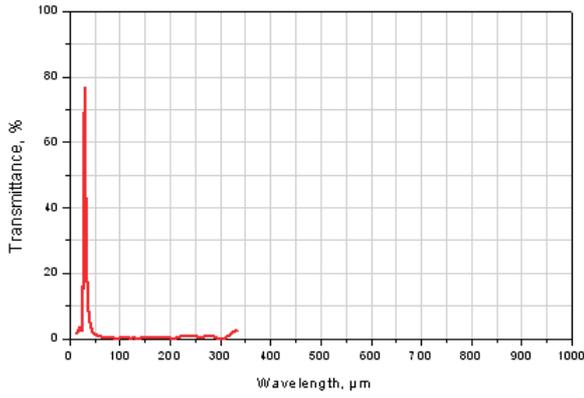


Fig. 6 Transmission of BPF10.0.

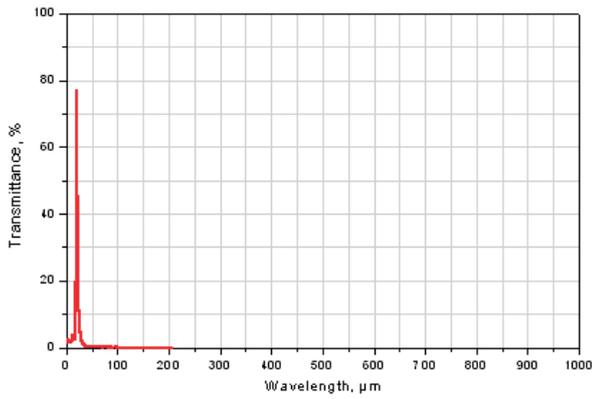


Fig. 7 Transmission of BPF15.0.



TYDEX[®]
J.S.C.O.

Domostroitelnaya str. 16, 194292 St.Petersburg, RUSSIA
Tel: 7-812-3346701, -3318702; Fax: 7-812-3092958
E-mail: optics@tydex.ru, URL: <http://www.tydex.ru>